

(19) World Intellectual Property Organization  
International Bureau.



(43) International Publication Date  
11 April 2002 (11.04.2002)


PCT

(10) International Publication Number  
**WO 02/30116 A1**


- (51) International Patent Classification<sup>7</sup>: **H04N 7/14**
- (21) International Application Number: PCT/US01/12894
- (22) International Filing Date: 19 April 2001 (19.04.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/237,013 29 September 2000 (29.09.2000) US  
09/698,297 27 October 2000 (27.10.2000) US
- (71) Applicant: **DIGEO, INC.** [US/US]; 8815 122nd Avenue NE, Kirkland, WA 98033 (US).
- (72) Inventor: **ALLEN, Paul**; 6451 West Mercer Way, Mercer Island, WA 98040 (US).
- (74) Agent: **CHRISTENSEN, Kory**; Madson & Metcalf, 15 West South Temple, Suite 900, Salt Lake City, UT 84101 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GI, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report

[Continued on next page]

(54) Title: REMOTE CONTROL DEVICE FOR VIDEO AND AUDIO CAPTURE AND COMMUNICATION

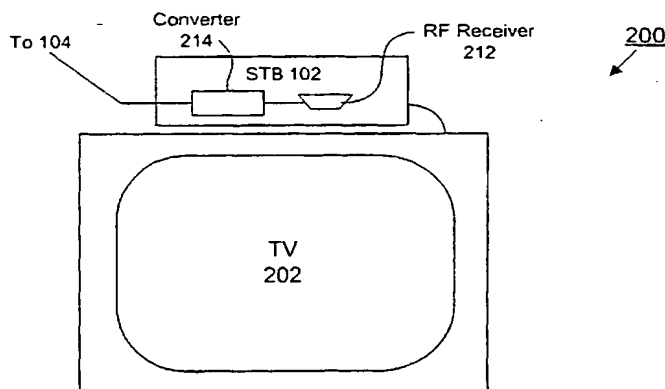

(57) Abstract: A remote control for an interactive television system includes an integrated camera (208) and a wireless transmitter (210) for transmitting video information captured by the camera to the interactive television system. A set top box (102) for the interactive television system includes a wireless receiver (212) for receiving the video information and a converter (214) for transforming the video information into a network-compatible video stream for transmission to a network.

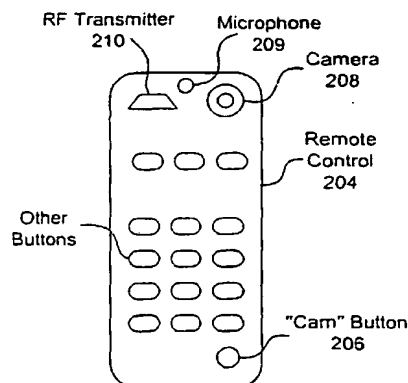

WO 02/30116 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# REMOTE CONTROL DEVICE FOR VIDEO AND AUDIO CAPTURE AND COMMUNICATION

5

## BACKGROUND OF THE INVENTION

### FIELD OF THE INVENTION

The present invention relates generally to interactive television systems, and more particularly, to a remote control device for video and audio  
10 capture and communication.

### DESCRIPTION OF THE BACKGROUND ART

Prior systems, methods, and devices for capturing and communicating video and audio information have various problems and disadvantages.

15 Consider conventional "webcam" (web camera) devices available today. Such cameras are designed to be mounted on, or placed near, a computer monitor. Designs for monitor-mounted cameras are shown, for example, in U.S. Design Patent No. D0363502 to MacMurtrie et al., entitled "Monitor mounted video camera," and No. D0363730 to Flohr et al., entitled "Video camera unit for mounting  
20 on a computer monitor." Both of these design patents are hereby incorporated by reference.

A commercially-available "webcam" product that is designed to be placed near a computer monitor is the Logitech Quickcam Pro USB® from Logitech, Inc., of Fremont, California. Such camera devices are typically connected via a  
25 cable to a port of the computer.

In general, monitor-mounted cameras are advantageous when used to capture images of a user sitting in front of the computer. Nevertheless, they present several problems and disadvantages.

First, it is awkward and difficult for a user to point such cameras in  
30 different directions. The user would typically have to be near the camera and reach over to change the camera's orientation. Second, such cameras are typically not very mobile, since they are connected via a physical cable to the computer. Unfortunately, this means that in order to capture an image of a subject, the subject must be physically placed within view of the camera at its fixed location. Third, due

to their immobility, such cameras often miss moments of primary interest to users, which are often transitory and do not occur in close proximity to a computer. For instance, a baby walking for the first time in the family room is very unlikely to be captured by such fixed or tethered devices.

5           Moreover, consider conventional systems and methods where such "webcam" devices are used for video communications. A conventional system would utilize a modem connection from a personal computer to an Internet service provider (ISP). Using such a connection, the captured video information would be transmitted from the personal computer of one user over the Internet to a personal computer of  
10           another user. Although this may achieve a rudimentary form of video conferencing between two users, such Internet-based video conferencing is typically unreliable and of uneven bandwidth due to limitations of the Internet.

### SUMMARY OF THE INVENTION

15           The present invention provides a remote control device for video and audio capture and communication that overcomes the above-described problems and disadvantages.

          In one aspect of the invention, a remote control for an interactive television system includes an integrated camera, such as a digital video camera, for  
20           capturing video information. The camera may include a charge-coupled device (CCD) array, and may be configured with a digital zoom feature, an automatic white balance feature, and an automatic exposure feature. In one embodiment, the camera is configured to capture an NTSC-compatible video signal.

          In another aspect of the invention, the remote control includes a  
25           wireless transmitter for transmitting video information captured by the camera to the interactive television system. In one embodiment, the wireless transmitter is a high-bandwidth, radio-frequency (RF) transmitter. The wireless transmitter may be configured to utilize a radio-frequency antenna integrated with a circuit board for the remote control.

30           In yet another aspect of the invention, the camera is configured to capture a still image, and the wireless transmitter is further configured to transmit the still image to the interactive television system. The remote control may include a digital storage device for storing still images captured by the camera.

### BRIEF DESCRIPTION OF THE DRAWINGS

5 Non-limiting and non-exhaustive embodiments of the present invention are described in the Figures, in which

FIG. 1 is a schematic block diagram of a television network according to an embodiment of the invention;

10 FIG. 2 is a schematic block diagram of an interactive television system according to an embodiment of the invention;

FIG. 3 is a schematic block diagram of a set top box according to an embodiment of the invention;

FIG. 4 is a plan view of a remote control according to an embodiment of the invention;

15 FIG. 5 is a schematic block diagram of an interactive television system according to an embodiment of the invention;

FIG. 6 is a schematic block diagram of a set top box according to an embodiment of the invention;

20 FIG. 7 is a plan view of a remote control according to an embodiment of the invention; and

FIG. 8 is a flowchart of a method for video capture and communication according to an embodiment of the invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Embodiments of a remote control device for video and audio capture and communication are described herein. In the following description, numerous specific details are provided, such as examples of programming, user selections, transactions, etc., to provide a thorough understanding of embodiments of the invention. One skilled in the relevant art will recognize, however, that the invention  
30 can be practiced without one or more of the specific details, or with other methods, components, materials, etc. In other instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of the invention.

Reference throughout this specification to "one embodiment" or "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, the appearances of the phrases "in one embodiment" or "in an embodiment" in various places throughout this specification are not necessarily all referring to the same embodiment. Furthermore, the particular features, structures, or characteristics may be combined in any suitable manner in one or more embodiments.

Throughout the following description, reference is made to both video and audio information. It should be understood, however, that the devices, systems, and methods of the present invention may be used to capture and communicate either video or audio information, or both, in various embodiments.

Referring now to FIG. 1, there is shown a television network 100, such as a cable network, according to an embodiment of the invention. In one implementation, the network 100 includes a plurality of set top boxes 102 (hereinafter STB 102) or other client terminals located, for instance, at customer homes. Generally, an STB 102 is consumer electronics device that serves as a gateway between a customer's television and a broadband communication network, such as a cable network. As its name implies, an STB 102 is typically located on top of, or in close proximity to, a customer's television.

In one embodiment, an STB 102 receives encoded video/audio signals (including television signals) from the network 100 and decodes the same for display on the television. Additionally, an STB 102 receives commands from a user (typically via a remote control) and transmits such commands back to the network 100.

In various embodiments, each STB 102 is connected to a headend 104. In the context of cable network, a headend 104 is a centrally-located facility where cable TV (CATV) channels are received from a local CATV satellite downlink and packaged together for transmission to customer homes. In one embodiment, the headend 104 also functions as a Central Office (CO) in the telephone industry, routing video and audio streams and other data to and from the various STBs 102 serviced thereby.

Headends 104 may be coupled directly to one another or through a network center 106. In some cases, headends 104 may be connected via a

separate network, one particular example of which is Internet 108. Of course, the illustrated network topology is provided for example purposes only, and other network topologies may be used within the scope of the invention.

As described in greater detail below, an STB 102 may transmit video and audio streams to one or more other STBs 102 connected to the network 100. The communication path for the transmission may involve one or more headends 104, network centers 106, and/or the Internet 108.

For example, a first STB 102 may send a video transmission upstream to a first headend 104, then to a second headend 104, and finally downstream to a second STB 102. The transmission may use various standard protocols, such as MPEG or video over IP (Internet Protocol).

The first and second headends 104 may be one and the same if the STBs 102 are served by the same headend 104. The transmission between headends 104 may occur (i) via a direct peer-to-peer connection between headends 104, (ii) upstream from the first headend 104 to a network center 106 and then downstream to the second headend 104, or (iii) via the Internet 108.

As described in detail hereafter, each STB 102 may be identified by a unique number, code or address, such as an IP (Internet Protocol) address. Thus, a user of one STB 102 may indicate an STB 102 to receive an audio or video transmission by specifying the corresponding address. The network 100 then routes the transmission to its destination using conventional techniques.

Referring now to FIG. 2, there is shown an interactive television system 200 according to an embodiment of the invention. The television system 200 preferably includes a television 202, which is configured to receive and display standard analog or digital television signals or high-definition television (HDTV) signals. In one embodiment, the television system 200 also includes a STB 102, as discussed above, for sending and receiving audio/video information (including television signals) or other data to and from the network 100. In an alternate embodiment, the functionality of the STB 102 is integrated into an advanced version of the television 202.

In one embodiment, a remote control 204 is provided for convenient remote operation of the STB 102 and the television 202. As described below, the remote control 204 may communicate with the STB 102 and television 202 using

conventional techniques to adjust, for example, the volume of the television, the displayed channel, and the like.

In the illustrated embodiment, the remote control 204 includes a camera 208, such as a color (or monochromatic) digital video camera. In accordance with one embodiment, the camera includes a progressive scan CCD (charged coupled device) array to deliver digital video up to 320 x 240 pixels in 24-bit color. Other resolutions and levels of color are also contemplated to be within the scope of the present invention. The resolution and levels of color of the camera may also be adjustable or selectable by the viewer. Furthermore, a zoom function may be provided for the camera 208. The zoom function may be lens based or preferably digitally based, e.g., a "digital zoom." In addition, the camera may be provided with automatic white balance and automatic exposure features to adjust for lighting and scene content. Of course, such automatic features may be turned off by the user.

The frame rate of the video capture may be 30 frames per second (NTSC, VHS, MPEG), 25 frames per second (PAL), 24 frames per second (motion picture), or other rates. For video conferencing, a frame rate of 8 frames per second provides a somewhat jerky video. Preferably, video conferencing applications using the present invention is performed at a frame rate of at least 10 frames per second for smoother motion. In one embodiment, the MPEG-4 protocol may be used for video conferencing applications using the present invention.

The camera may be used to capture not only video, but also still-pictures. Such still-pictures may be stored in JPEG, BMP, TIFF, or other formats in a digital storage device in the STB 102. Alternatively, the remote control 204 itself may include a digital storage device to store such still-pictures. In accordance with one embodiment, the resolution of the camera when used to capture still-pictures may be greater than the resolution when used to capture video.

The camera is preferably disposed on a surface of the remote control 204 to provide a generally unobstructed view for the camera 208. In particular embodiments, the camera may be disposed on the same surface as the majority of the buttons, or it may be disposed on a surface perpendicular to that surface.

In one embodiment, the camera 208 is capable of capturing a series of images in real time and converting the same into analog or digital video signals. The camera 208 is in electrical communication with a specifically-designated button, such as a camera ("cam") button 206, which toggles operation of the camera 208 in one



implementation. The remote control 204 may further include additional buttons to control various features of the STB 102 and the television 202. As used herein, the term "button" includes other types of controls, such as switches and the like. In addition, more than one button or control may be provided to activate and deactivate the camera 208.

In one embodiment, the remote control 204 also includes a microphone 209 for receiving sound waves and converting the same into analog or digital audio signals. The microphone 209 may be further in communication with the "cam" button 206 to toggle the operation thereof. Alternatively, the microphone 209 may be enabled through a separate button on the remote control 204.

In the illustrated embodiment, the remote control 204 further includes a radio frequency (RF) transmitter 210. In alternative embodiments, the transmitter 210 may be configured to transmit using infrared (IR), microwave, VHF, UHF, or other frequencies along the electromagnetic spectrum.

In one implementation, the transmitter 210 is in electrical communication with the camera 208 to receive video information captured by the camera 208. The transmitter 210 may further be in electrical communication with the microphone 209 to receive audio information.

The transmitter 210 preferably modulates the video and/or audio information with a carrier frequency to enable transmission of the information to the STB 102 using techniques well known in the art. For example, the transmitter 210 may operate according to the IEEE 802.11a or 802.11b Wireless Networking standards, the "Bluetooth" standard, or according to other standard or proprietary wireless techniques. Modulation techniques may include spread spectrum, frequency shift keying, multiple carrier, or other techniques known in the art. To achieve modulation and transmission, the transmitter 210 may include various additional components not specifically illustrated but well known in the art. For example, the transmitter 210 may include a source encoder to reduce the amount of bandwidth required, a channel encoder to modulate the video and/or audio information with a carrier wave, and a directional or non-directional transmission antenna. The transmitter 210 may further include an amplifier to increase the transmission signal strength to an appropriate power level.

In accordance with one embodiment, the transmitter 210 comprises an integrated RF antenna (linear or otherwise configured) etched onto the main printed

circuit board of the remote 204. Integration of the antenna with the remote control's circuit board provides for compactness and efficiency in manufacture.

Preferably, the transmitter 210 is a high-bandwidth transmitter capable of sending the video/audio information to the STB 102 in real time. In one embodiment, the transmitter 210 may use wideband frequency modulation over a frequency band to provide a one-way video/audio link from the remote control 204 to the STB 102. For example, frequency band may be within the 890-960 MHz range (GSM), 1990-2110 MHz range or 2400-2500 MHz range or other frequency ranges as approved by FCC regulations. The one-way video/audio link between remote control 204 and STB 102 also provides for efficiency in manufacture, as a two-way video/audio link is not required in accordance with this embodiment. In another embodiment, the transmitter 210 utilizes a frequency division multiplexing (FDM) technique in order to transmit several streams of data simultaneously. These streams may be reassembled at the STB 102 to derive the encoded video/audio information. Various other techniques for providing a high bandwidth in multimedia transmissions may also be used within the scope of the invention.

In one embodiment, the transmitter 210 is configured to broadcast digital signals. As such, the transmitter 210 may include an analog-to-digital converter (ADC) to convert analog video/audio signals from an analog camera system into digital information. The present invention contemplates the use of analog or digital or both types of transmissions from the remote control 204.

In various embodiments, the remote control 204 is also in electrical communication with a processor (not shown) that senses a user's operation of the buttons of the remote control 204 and generates appropriate command signals for transmission to the STB 102 and television 202 in order to control the operation of the same.

In the illustrated embodiment, the STB 102 includes an RF receiver 212 for receiving transmissions from the transmitter 210 in the remote control 204. Such a receiver 212 may include an antenna integrated into a printed circuit board (either a main board or a card coupled to a main board) within the STB 102. The receiver 202 may also demodulate video/audio information from the modulated band transmitted by the remote control 204. In various embodiments, the receiver 212 may be configured to receive IR, microwave, VHF, UHF, or other frequencies. In

one embodiment, the receiver 212 demodulates the video/audio information contained within a carrier frequency of the transmission.

The receiver 212 may further include components not specifically illustrated but well known in the art. For example, the receiver 212 may include an  
5 antenna for receiving the transmission, an amplifier for increasing the strength of the received signal, and a decoder for separating and demodulating the video and/or audio information from the carrier signal.

In one implementation, the receiver 212 is in electrical communication with a converter 214, which converts the video and/or audio information into a digital  
10 video and/or audio stream compatible for transmission over the network 100. The conversion process may include compressing the information to improve transmission speed.

As noted above, the converter 214 is in electrical communication with a headend 104 in order to transmit the network-compatible video/audio stream to one  
15 or more other STBs 102 in the network 100. The converter 214 is further configured to receive network-compatible video/audio streams from the network 100 and transform the same into display-compatible video/audio signals for display/playback on the television 202. In particular, the transmission from the STB 102 to the network 100 must be made to be compatible with upstream transmission in the  
20 network 100. For example, in a cable distribution network 100, one or more frequency bands (for example from 5 to 30 MHz) may be reserved for upstream transmission. Digital modulation (for example, quadrature amplitude modulation or vestigial sideband modulation) may be used to send digital signals in the upstream transmission. Various protocols, such as MPEG or video over IP, may be used to  
25 embed the video/audio stream in the digital signals. Upstream transmission will be accomplished differently for different networks 100. Alternative ways to accomplish upstream transmission include an analog telephone line, ISDN, DSL, or other techniques.

Referring to FIG. 3, there is shown an expanded block diagram of an  
30 STB 102 according to an embodiment of the invention. The STB 102 may include a storage interface 302, which provides access to a digital storage device 304, such as a hard disk drive or the like. In one embodiment, the storage interface 302 receives video/audio information from the receiver 212 and delivers the same to the digital storage device 304 for storage. The video/audio information may be stored in an

MPEG format or other encoded file formats. Alternatively, the video/audio information may be converted by the converter 214 into a network-compatible video/audio stream before being stored in the storage device 304.

5 In one embodiment, the converter 214 includes conventional interface circuitry for communicating with the network 100. In an alternative embodiment, a separate network interface (not shown) may be provided, such as a cable modem or the like. Such a cable modem may operate in accordance with the DOCSIS or DAVIC standards.

10 The STB 102 may further include a random access memory (RAM) 306 configured to store data for temporary use. Similarly, a read-only memory (ROM) 308 may be provided for storing more permanent data, such as fixed code and configuration information. In one embodiment, the ROM 308 may be used to store an operating system for the STB 102, such as Windows CE® or Linux®.

15 The STB 102 preferably includes a controller 310 that is in communication with the receiver 212, the converter 214, the storage interface 302, the RAM 306, the ROM 308, and the converter 214. The controller 310 may be coupled to the other components of the STB 102 via a bus 312.

20 In various embodiments, the controller 310 may be embodied as a microcontroller, a microprocessor, a digital signal processor (DSP) or other device known in the art. The controller 310 manages the operation of the STB 102, including, for example, the conversion of the encoded video/audio information, the storage of the video/audio information, the transmission and reception of video/audio information from the network 100, and the like. As noted above, the controller 310 may perform these and other operations based on control signals generated by the  
25 remote control 204 and transmitted to the receiver 212.

In operation, the video/audio information received from the remote control 204 may be displayed directly on the television 202 coupled to the STB 102. As described in greater detail below, the video/audio information may also be converted, compressed and transmitted across the network 100 to one or more other  
30 STBs 102 where it is displayed on corresponding televisions 202.

In one embodiment, a user may select which STB(s) 102 will receive a video/audio transmission by entering one or more addresses of the receiving STB(s) 102 using the remote control 204. As noted above, the address of an STB 102

uniquely identifies the STB 102 within the network 100 and is used by the headends 104, network centers 106, and/or the Internet 108 to route a network-compatible video/audio stream to the appropriate STB 102 using conventional techniques.

5 In various embodiments, an STB 102 may simultaneously send and receive multiple video/audio streams. In this manner, video conferencing of networked interactive television systems 200 is enabled.

FIG. 4 provides an expanded view of the remote control 204, including the camera 208, the microphone 209, the transmitter 210, and the "cam" button 206. In addition, FIG. 4 illustrates an activity indicator 402, which illuminates or otherwise  
10 signals the user when the camera 208 and/or microphone 209 is active. The activity indicator 402 may be embodied as an LED (light-emitting diode) or other suitable indicator. As illustrated, the remote control 204 may include a number of other buttons or controls, such as an "accept" button 406, a "reject" button 408, and a "switch" button 410, the functions of which are described below.

15 Those skilled in the art will recognize that the various components of the remote control 204 may be positioned in different locations for ergonomics and ease-of-use. For example, the camera 208, "cam" button 206, and activity indicator 402 may be disposed at any convenient and ergonomic location within the remote control 204.

20 Referring now to FIG. 5, there is shown an alternative interactive television system 500 according to an embodiment of the invention. The television system 500 differs primarily from the television system 200 of FIG. 2 in that the camera 208 and microphone 209 are disposed within a STB 502 rather than a remote control 504.

25 In the illustrated embodiment, the remote control 504 includes an infrared (IR) transmitter 506 for sending control signals to an IR receiver 508 within the STB 502 and/or the television 202. In alternative embodiments, however, the transmitter may use RF, VHF, UHF, microwave, or other frequencies. In one embodiment, the remote control 504 also includes a "cam" button 206 for enabling  
30 remote operation of the camera 208 and/or the microphone 209 disposed within the STB 502.

Referring to FIG. 6, there is shown an expanded block diagram of the STB 502. The converter 214, the storage interface 302, the digital storage device 304, the RAM 306, the ROM 308, and the controller 310 function as previously

described with reference to FIG 3. However, the STB 502 includes a camera 208 and a microphone 209, which are depicted as being in communication with the bus 312. In addition, the STB 502 is depicted as including an activity indicator 402 for visually indicating to a user when the camera 208 is active.

5                   FIG. 7 provides an expanded view of the remote control 504, including the IR transmitter 506, the "cam" button 206, the "accept" button 406 and the "reject" button 408. The remote control 504 may also include a separate activity indicator 402 in addition to the indicator 504 in the STB 502. Those skilled in the art will recognize that the various components of the remote control 504 may be positioned  
10 in different locations for convenience and ergonomics.

In yet another alternative embodiment, the remote control 504 and the STB 502 may both be configured with a camera 208 and/or a microphone 209. This would allow a user to select between a camera 208 disposed locally on the remote control 504 and a camera 208 disposed remotely on the STB 102. Thus, a user may  
15 conveniently switch between a stationary camera 208 at a fixed distance or a remote-mounted camera 208 that is highly mobile, depending on the subject to be viewed. In one embodiment, the "switch" button 410 of FIG. 4 may be used for this purpose.

FIG. 8 is a flowchart of a method 800 for video and audio capture and  
20 communication according to an embodiment of the invention. The method 800 begins when a user of a first STB 102 selects 802 a second STB 102 (or set of STBs 102) in the network 100 to receive a video/audio transmission. The selection may be performed by entering an identification of the second STB 102 or a user thereof by means the remote control 204. If a user's name is specified, for example, the first  
25 STB 102 may access a name server or directory (not shown) to retrieve a corresponding address of the second STB 102. In one embodiment, the first STB 102 may contain a local directory of addresses to which the user frequently sends video/audio transmissions.

Once the first STB 102 has a valid address, it sends a request across  
30 the network 100 to the second STB 102. The precise format of the request is not crucial to the invention, but the request should indicate to the second STB 102 that the user of the first STB 102 desires to send a video/audio transmission.

In response to the request, the second STB 102 generates a notification, such as a text message or icon, for display on the corresponding

television 202 to notify the user of the second STB 102 of the video/audio transmission. Alternatively, the notification may take the form of an audio signal that is played on a speaker (not shown) in the STB 102 or the television 202.

5 If the second STB 102 is off-line or otherwise not available, the first STB 102 may wait until a timeout period has expired, after which it notifies the user that the audio/video transmission cannot be sent. Likewise, if the user of the second STB 102 does not respond, or refuses to receive the transmission (by means of the "reject" button 408 of FIG. 4, for example) a not-available signal may be returned to the first STB 102.

10 If the user of the second STB 102 wishes to receive the video/audio transmission, she may press a suitable button the remote control 204, such as the "accept" button 406 of FIG. 4, which results in an acceptance signal being returned to the first STB 102. In one embodiment, the first STB 102 generates, in response to receiving the acceptance signal, a video or audio acceptance message to notify  
15 the user that permission for the video/audio transmission has been granted.

The first and second STBs 102 may then initiate 804 a handshake procedure to establish a communication protocol. Such a handshake procedure may have some similarity with handshake procedures performed between facsimile (fax) machines. In this case, the STBs 102 may negotiate a new protocol or reaffirm an  
20 existing protocol for video/audio communication. The appropriate protocol may need to be determined because the two STBs have different video/audio conferencing capabilities. For example, the second STB may be capable of video conferencing at a lower resolution (or frame rate), so the communication protocol would be established as is suitable to this lower resolution (or frame rate). The communication  
25 protocol used may also depend on the bandwidth and/or reliability of the connection between the two set top boxes. At this point, an active communication link is established between the first and second STBs 102 across the network 100.

In one embodiment, the first user then activates 806 the camera 208 and/or microphone 209 by pressing, for example, the "cam" button 206. In one  
30 implementation, the remote control 204 and/or STB 102 indicates 808 activation of the camera 208 by a visual mechanism, such as an activity indicator 402 (e.g., LED). Thereafter, the camera 208 and/or microphone 209 captures 810 a video and/or audio signal (which is transmitted to the STB 102 in the case of the remote control 204 of FIG. 2).

The converter 214 within the STB 102 then transforms 812 the captured video/audio signal into a network-compatible video/audio stream for transmission over the network 100. Thereafter, the network-compatible video/audio stream is transmitted 814 upstream to the network 100. As noted with reference to  
5 FIG. 1, the communication path for the transmission may involve one or more headends 104, network centers 106, and/or the Internet 108, using conventional routing techniques.

In one embodiment, the network-compatible video/audio stream is then transmitted 816 downstream from the network 100 to the second STB 102.  
10 Thereafter, the network-compatible video/audio stream is transformed 818 into a display-compatible video/audio signal for display 820 on the television 202.

In a like manner, the second STB 102 may transmit video/audio information to the first STB 102. Indeed, in one embodiment, multiple video/audio streams may be received and transmitted simultaneously by a STB 102. Multiple  
15 video streams received by a STB 102 may be displayed on a television 202 at the same time using picture-in-picture (PIP) techniques. Likewise, multiple audio streams may be mixed for playback on the television 202. Thus, video conferencing between two or more users of networked interactive television systems 200 is enabled.

Of course, the above-described method 800 is only one possible  
20 technique for video and audio capture and communication within the scope of the invention. In alternative embodiments, the first STB 102 may transmit a video/audio stream to the second STB 102 without waiting for an acceptance signal. The second STB 102 may record all incoming transmissions in the digital storage device 304.  
25 Thereafter, a user of the second STB 102 may review the stored video/audio streams and select which stream, if any, to display at a convenient time.

In yet another alternative embodiment, the first STB 102 may be pre-configured to transmit video/audio information to a second STB 102, which has previously granted permission to receive the transmission. Accordingly, a user of the  
30 first STB 102 may simply press the "cam" button 206 to immediately capture video/audio information and transmit the same to the second STB 102 for immediate display.

Alternatively, the video/audio conferencing may occur between the first STB 102 and a client terminal more generically (not just a second STB 102). The



client terminal may comprise a personal computer or other device with a connection to the Internet 108. Such other devices may include Internet appliances, personal digital assistants, Internet-enabled cell phones, and the like. These devices are likely to have varying videoconferencing capabilities, so a handshaking procedure as  
5 described above is likely to be quite useful in determining a proper communication protocol.

In view of the forgoing, the present invention offers numerous advantages not available in the prior art. By integrating, in a compact manner, a camera 208 and/or microphone 209 with a remote control 204 for an interactive  
10 television system 200, a user may easily capture video images of events that would be difficult or impossible to capture with conventional "webcam" devices. Because the remote control 204 is not limited by a physical cable, a user has the flexibility of carrying the remote control 204 to any desired location. Even in an embodiment in which the camera 208 is integrated with the STB 102, it is likely that a user will be  
15 able to capture events of primary interest, since televisions 202 their associated STBs 102 are normally located in areas of high use, such as family rooms and the like.

The above description of illustrated embodiments of the invention is not intended to be exhaustive or to limit the invention to the precise forms disclosed.  
20 While specific embodiments of, and examples for, the invention are described herein for illustrative purposes, various equivalent modifications are possible within the scope of the invention, as those skilled in the relevant art will recognize.

These modifications can be made to the invention in light of the above detailed description. The terms used in the following claims should not be construed  
25 to limit the invention to the specific embodiments disclosed in the specification and the claims. Rather, the scope of the invention is to be determined by the following claims, which are to be construed in accordance with established doctrines of claim interpretation.

CLAIMS

What is claimed is:

- 1 1. A device for video capture and communication comprising:  
2 a remote control for an interactive television system;  
3 a camera integrated with the remote control; and  
4 a wireless transmitter integrated with the remote control for transmitting video  
5 information captured by the camera to the interactive television system.
- 1 2. The device of claim 1, further comprising:  
2 a microphone integrated with the remote control;  
3 wherein the wireless transmitter is configured to transmit audio information  
4 captured by the microphone to the interactive television system.
- 1 3. The device of claim 1, wherein the wireless transmitter comprises a high-  
2 bandwidth, radio-frequency transmitter.
- 1 4. The device of claim 3, wherein the radio-frequency transmitter is configured to  
2 utilize a radio-frequency antenna integrated with a circuit board for the device.
- 1 5. The device of claim 1, wherein the camera comprises a digital video camera.
- 1 6. The device of claim 5, wherein the digital video camera comprises a charged-  
2 coupled device array.
- 1 7. The device of claim 6, wherein the digital video camera further comprises a  
2 digital zoom feature.
- 1 8. The device of claim 6, wherein the digital video camera further comprises an  
2 automatic white balance feature.
- 1 9. The device of claim 6, wherein the digital video camera further comprises an  
2 automatic exposure feature.
- 1 10. The device of claim 6, wherein the digital video camera is configured to  
2 capture an NTSC-compatible video signal.

1 11. The device of claim 1, wherein the camera is further configured to capture a  
2 still image, and wherein the wireless transmitter is further configured to transmit the  
3 still image to the interactive television system.

1 12. The device of claim 11, further comprising:  
2 a digital storage device integrated with the remote control for storing the still  
3 image captured by the camera.

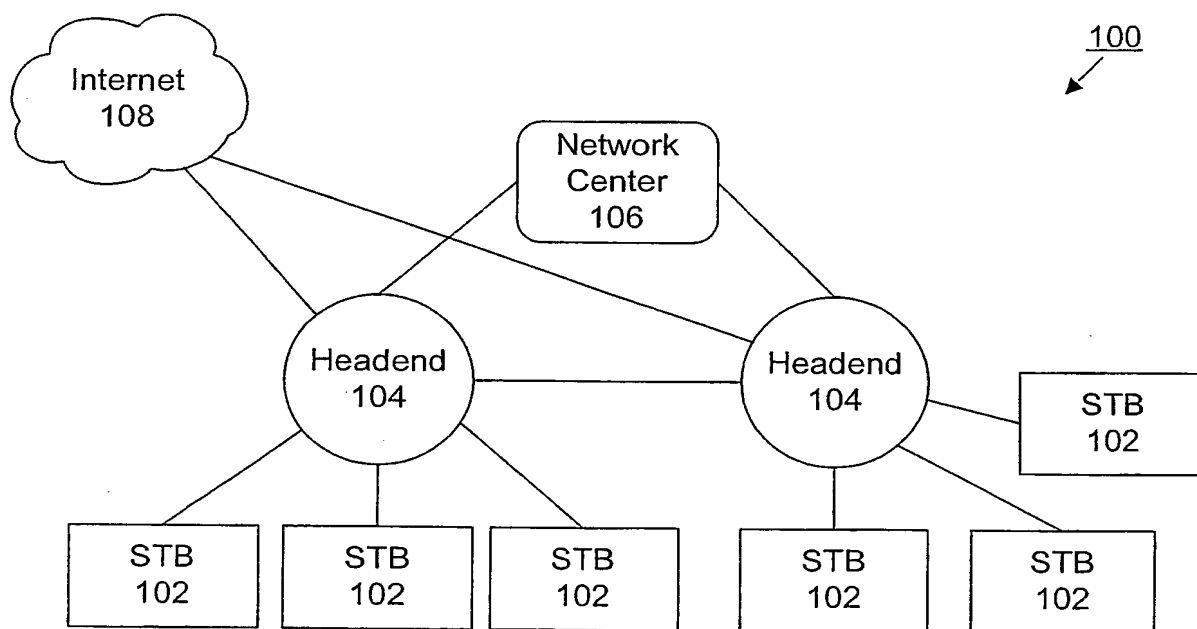


FIG. 1

2/8

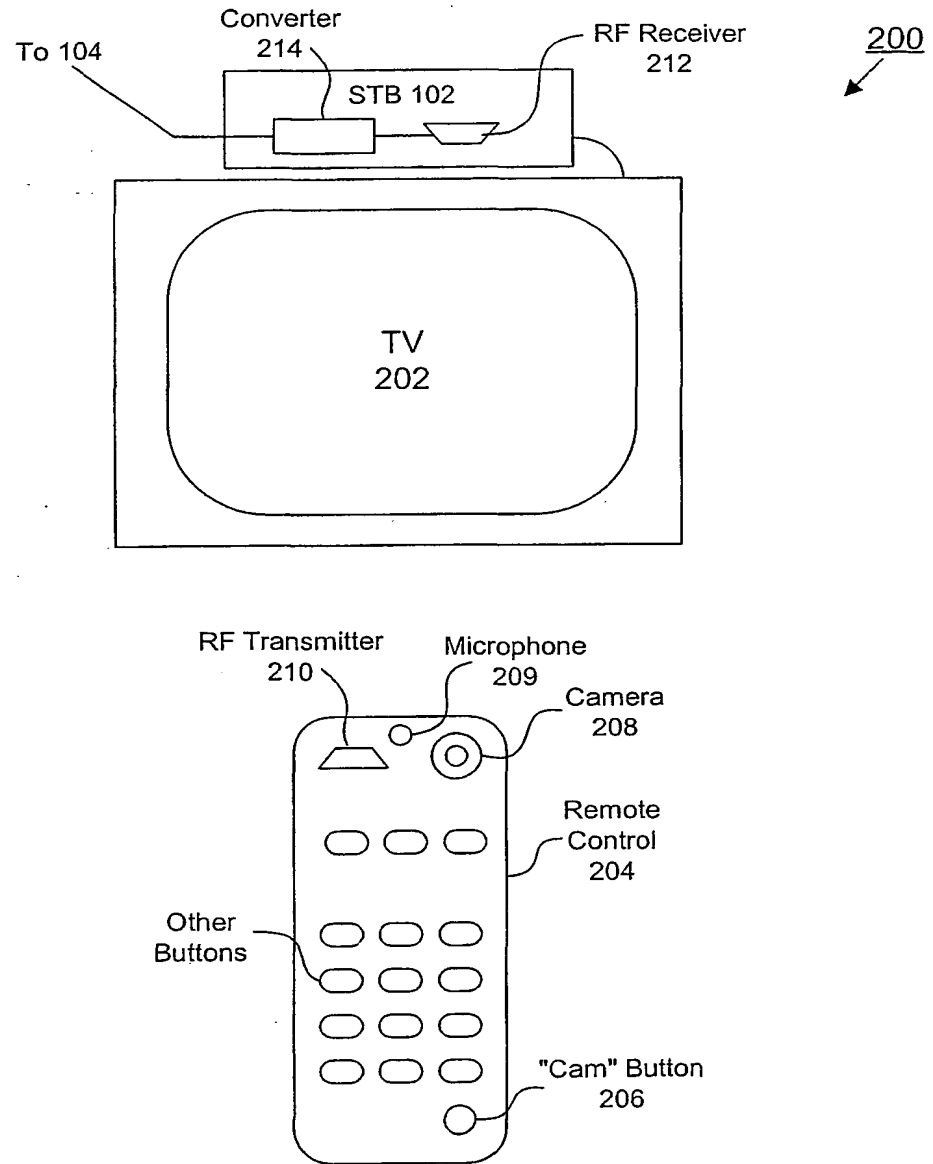


FIG. 2

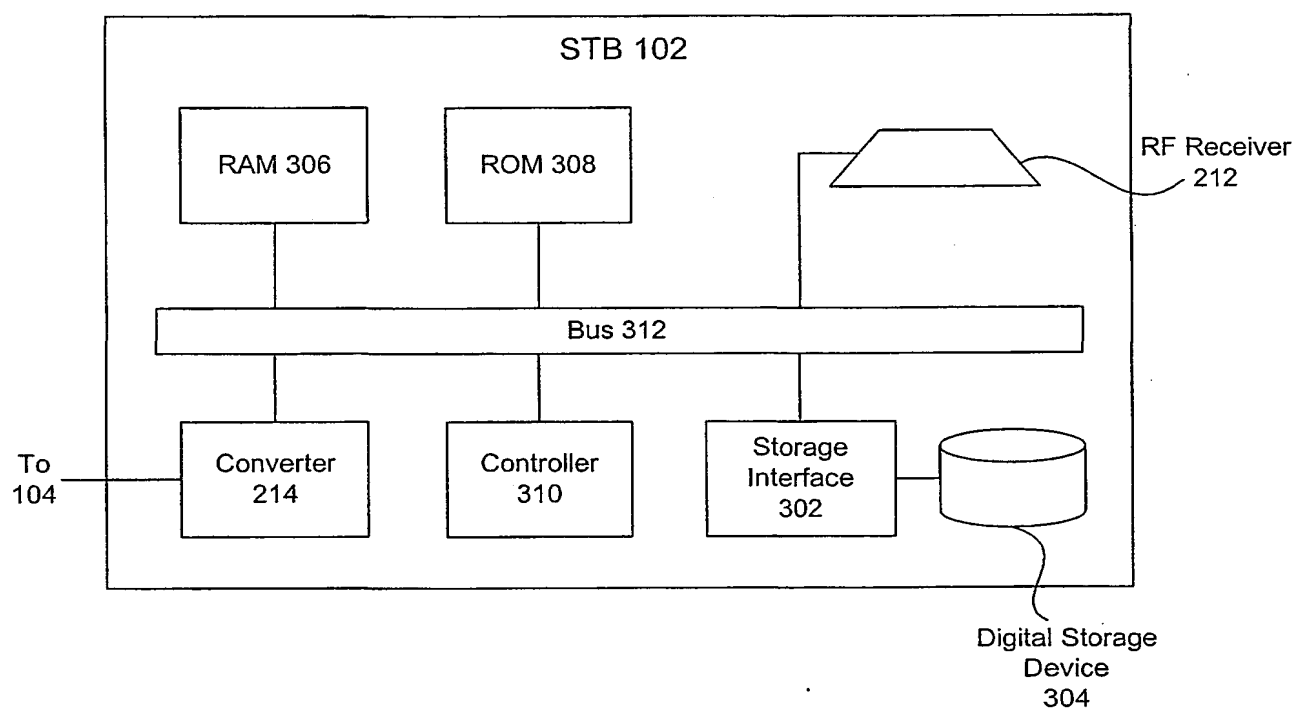


FIG. 3

4/8

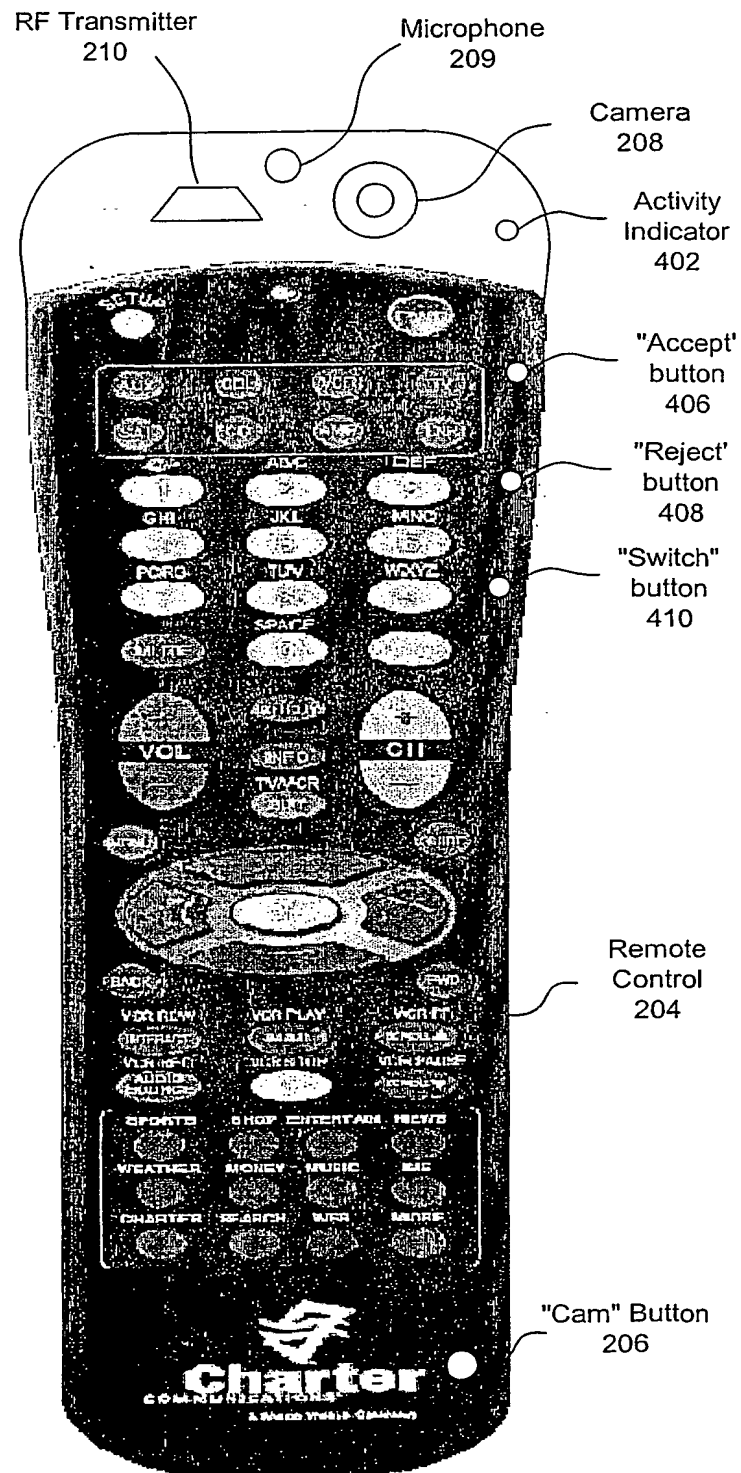


FIG. 4

5/8

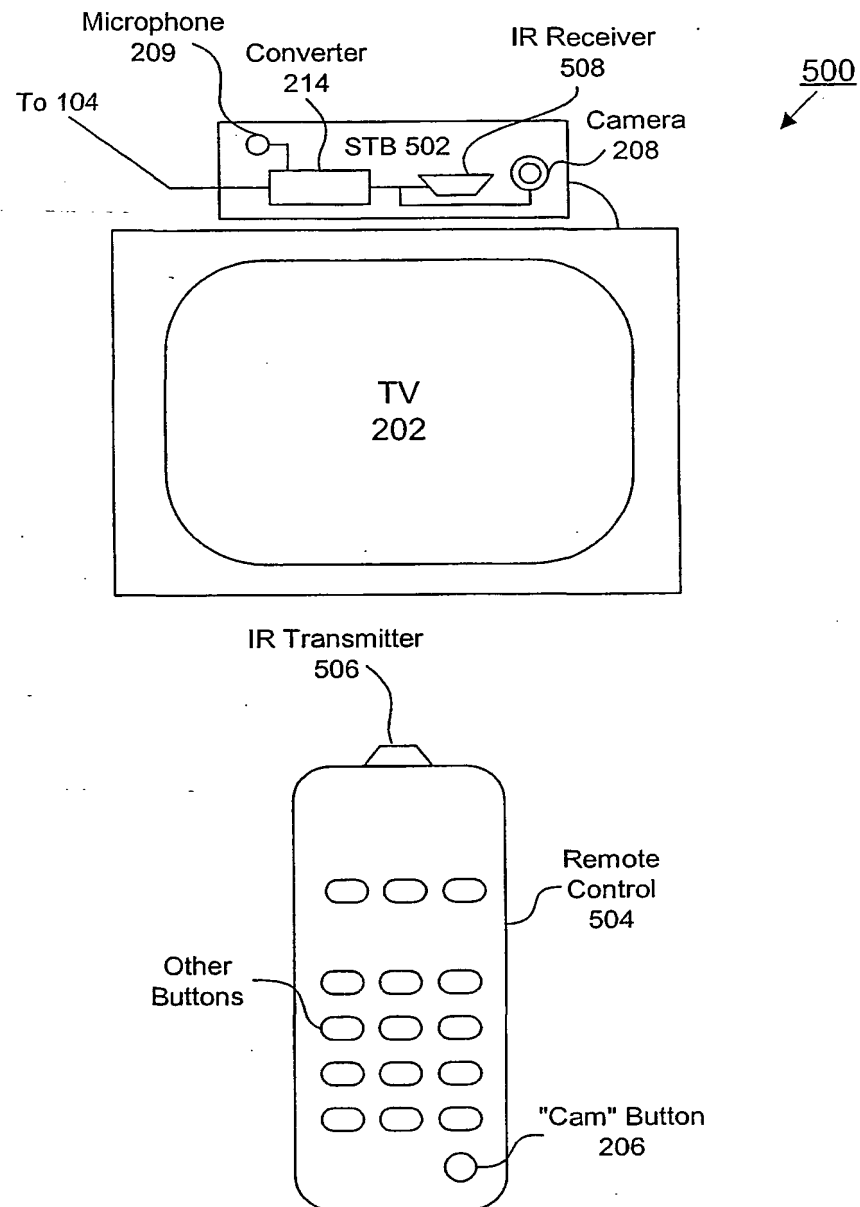


FIG. 5



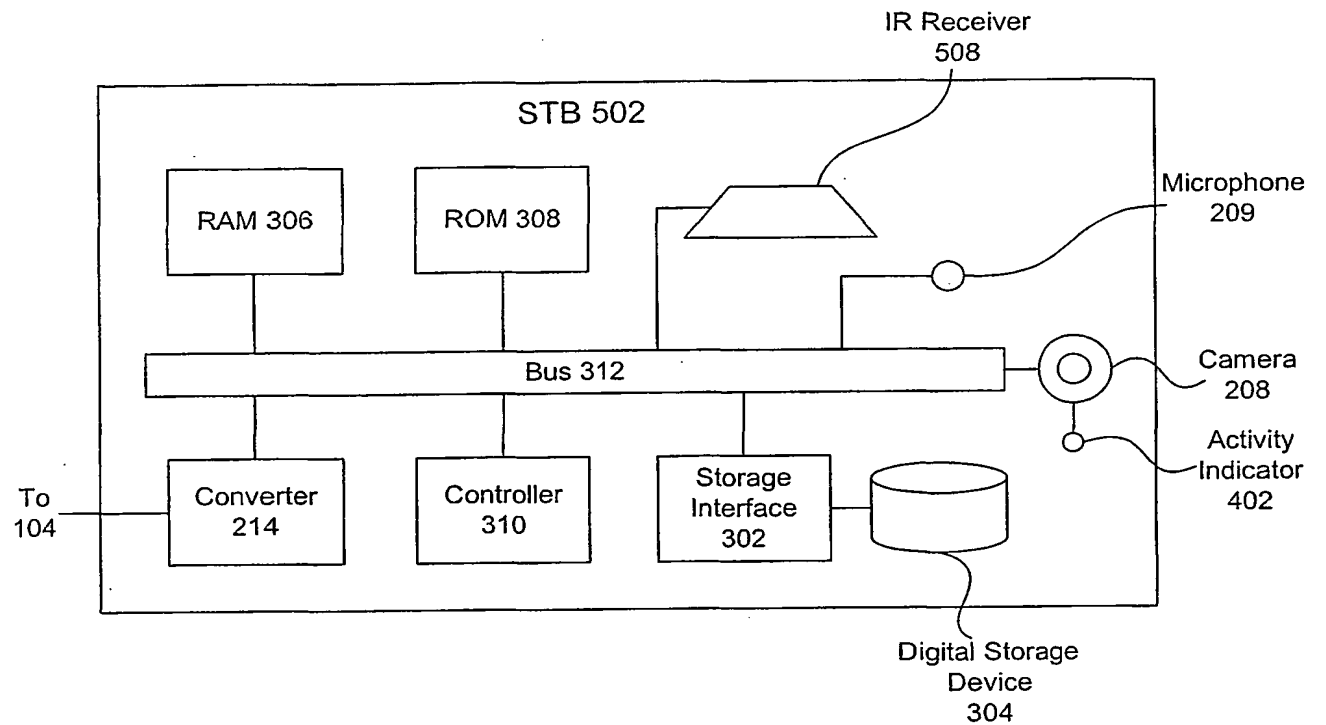


FIG. 6

7/8

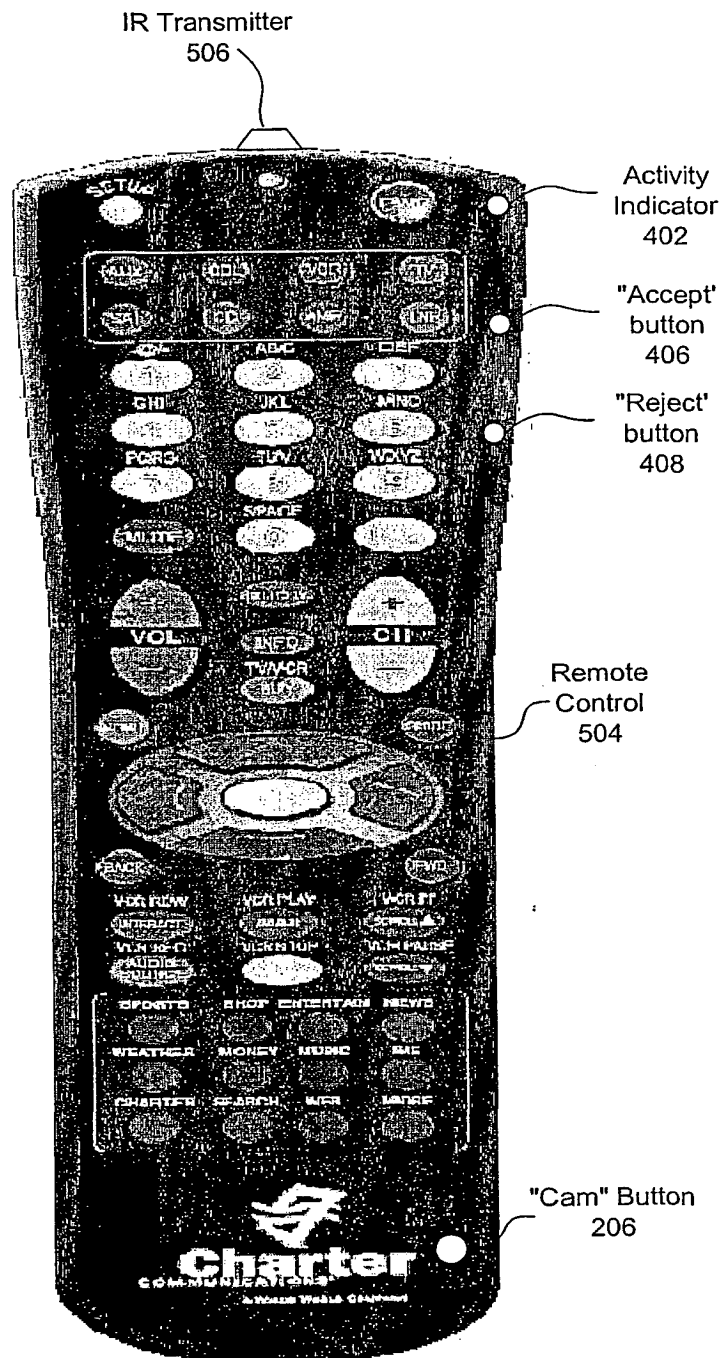


FIG. 7

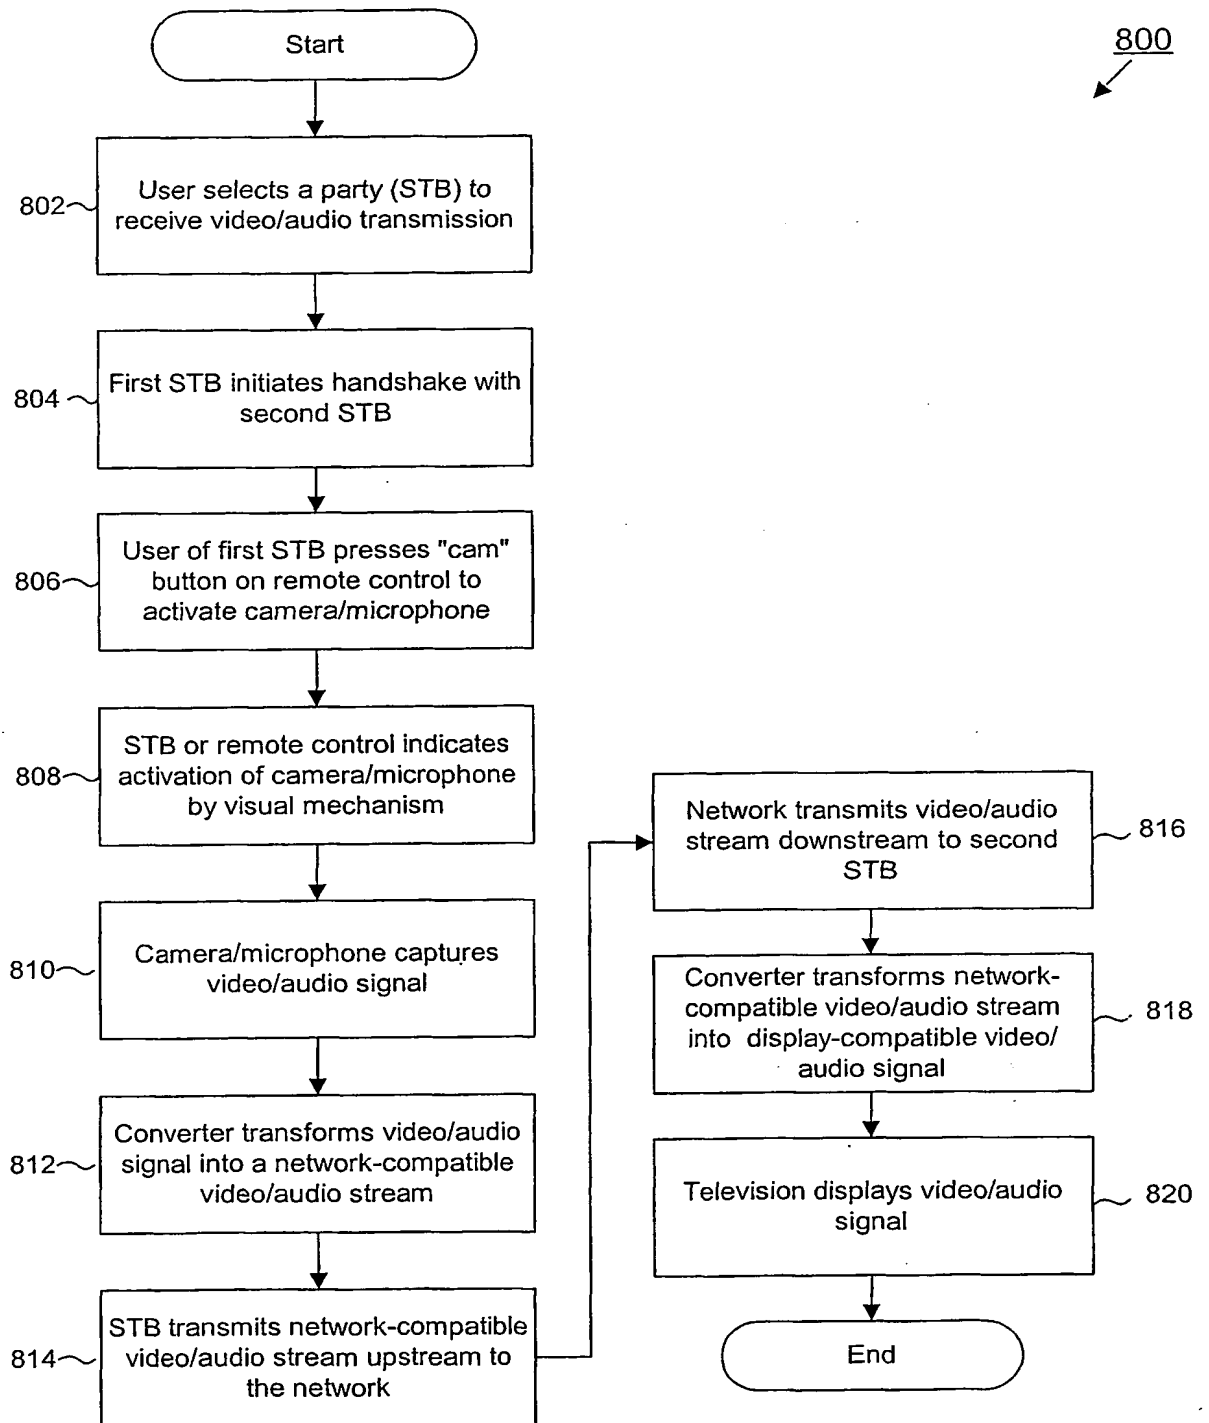


FIG. 8

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US01/12894

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04N 7/14

US CL : 348/14.01

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/14.01, 14.02, 14.03, 14.04, 14.05, 14.06, 14.07, 734; 379/93.17, 93.23; 725/100, 139, 141, 153

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WEST

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP406351016 A (HASEYAMA et al.) 22 DECEMBER 1994, fig. 1, see abstract	1-12
Y	US 5,999,207 A (RODRIGUEZ et al.) 07 DECEMBER 1999, figs. 1-12, (col. 5 lines 55-67, col. 6 lines 1-38)	1-12
Y	JP02000156869 A (YOKONUMA) 06 JUNE 2000, (see abstract)	6-10
Y	JP411234639A (OZAKI) 27 AUGUST 1999, (see abstract)	10
Y	JP411069463 A (KONDO et al.) 09 MARCH 1999, fig. 1, (see abstract)	12

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

28 MAY 2001

Date of mailing of the international search report

13 JUN 2001

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MELUR RAMAKRISHNAIAH

Telephone No. (703) 305-1461

Form PCT/ISA/210 (second sheet) (July 1998) \*

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**